


Figur 3 Grensekurver for fastsand

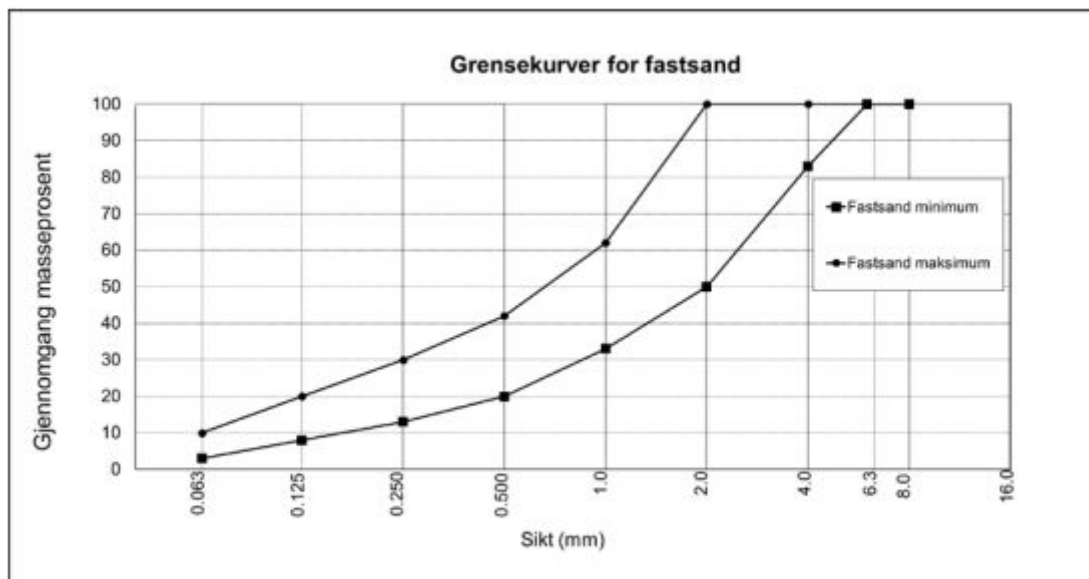

Figur 3: Grensekurver for fastsand

Sikt [mm]	0,063	0,125	0,25	0,5	1	2	4	6
Maksimum gjennomgang [%]	10	20	30	43	62	100	100	100
Minimum gjennomgang [%]	3	8	13	20	33	50	83	100

Korngradering skal dokumenteres iht NS-EN 933-1.