




Nightspot LED



Design: Roy Fleetwood

Nightspot luminaires are characterised by their exemplary design and technical precision. The product range has been extensively re-worked to take new high performance LED modules which offer a higher luminous flux and a wider range of optical systems. Rotationally symmetrical optical systems are fitted with secondary reflectors in order to reduce glare. For street and pathway lighting there is an optical lense with batwing distribution. An RGBW version rounds off the range with a useful product for colour changing installations.


A compact LED gobo projector allows sharp-edged image projections of highest quality. The optical system is extremely efficient and can take a gobo and colour filter simultaneously.

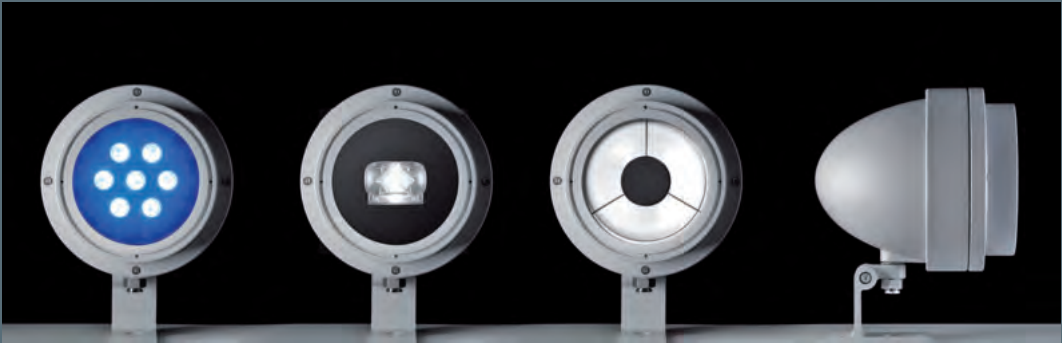


Nightspot B is available with 3 different optics: rotationally symmetrical with secondary reflector, with a street lighting optic or with an RGBW mixing optic.

Nightspot pole luminaires can be used for the imaginative lighting of public spaces. They create uniform illumination or can be used for highlighting purposes. They can even be combined with gobo projectors in order to project images. The fixing system ensures a durable and robust installation, at the same time allowing the luminaires to be aimed as required.



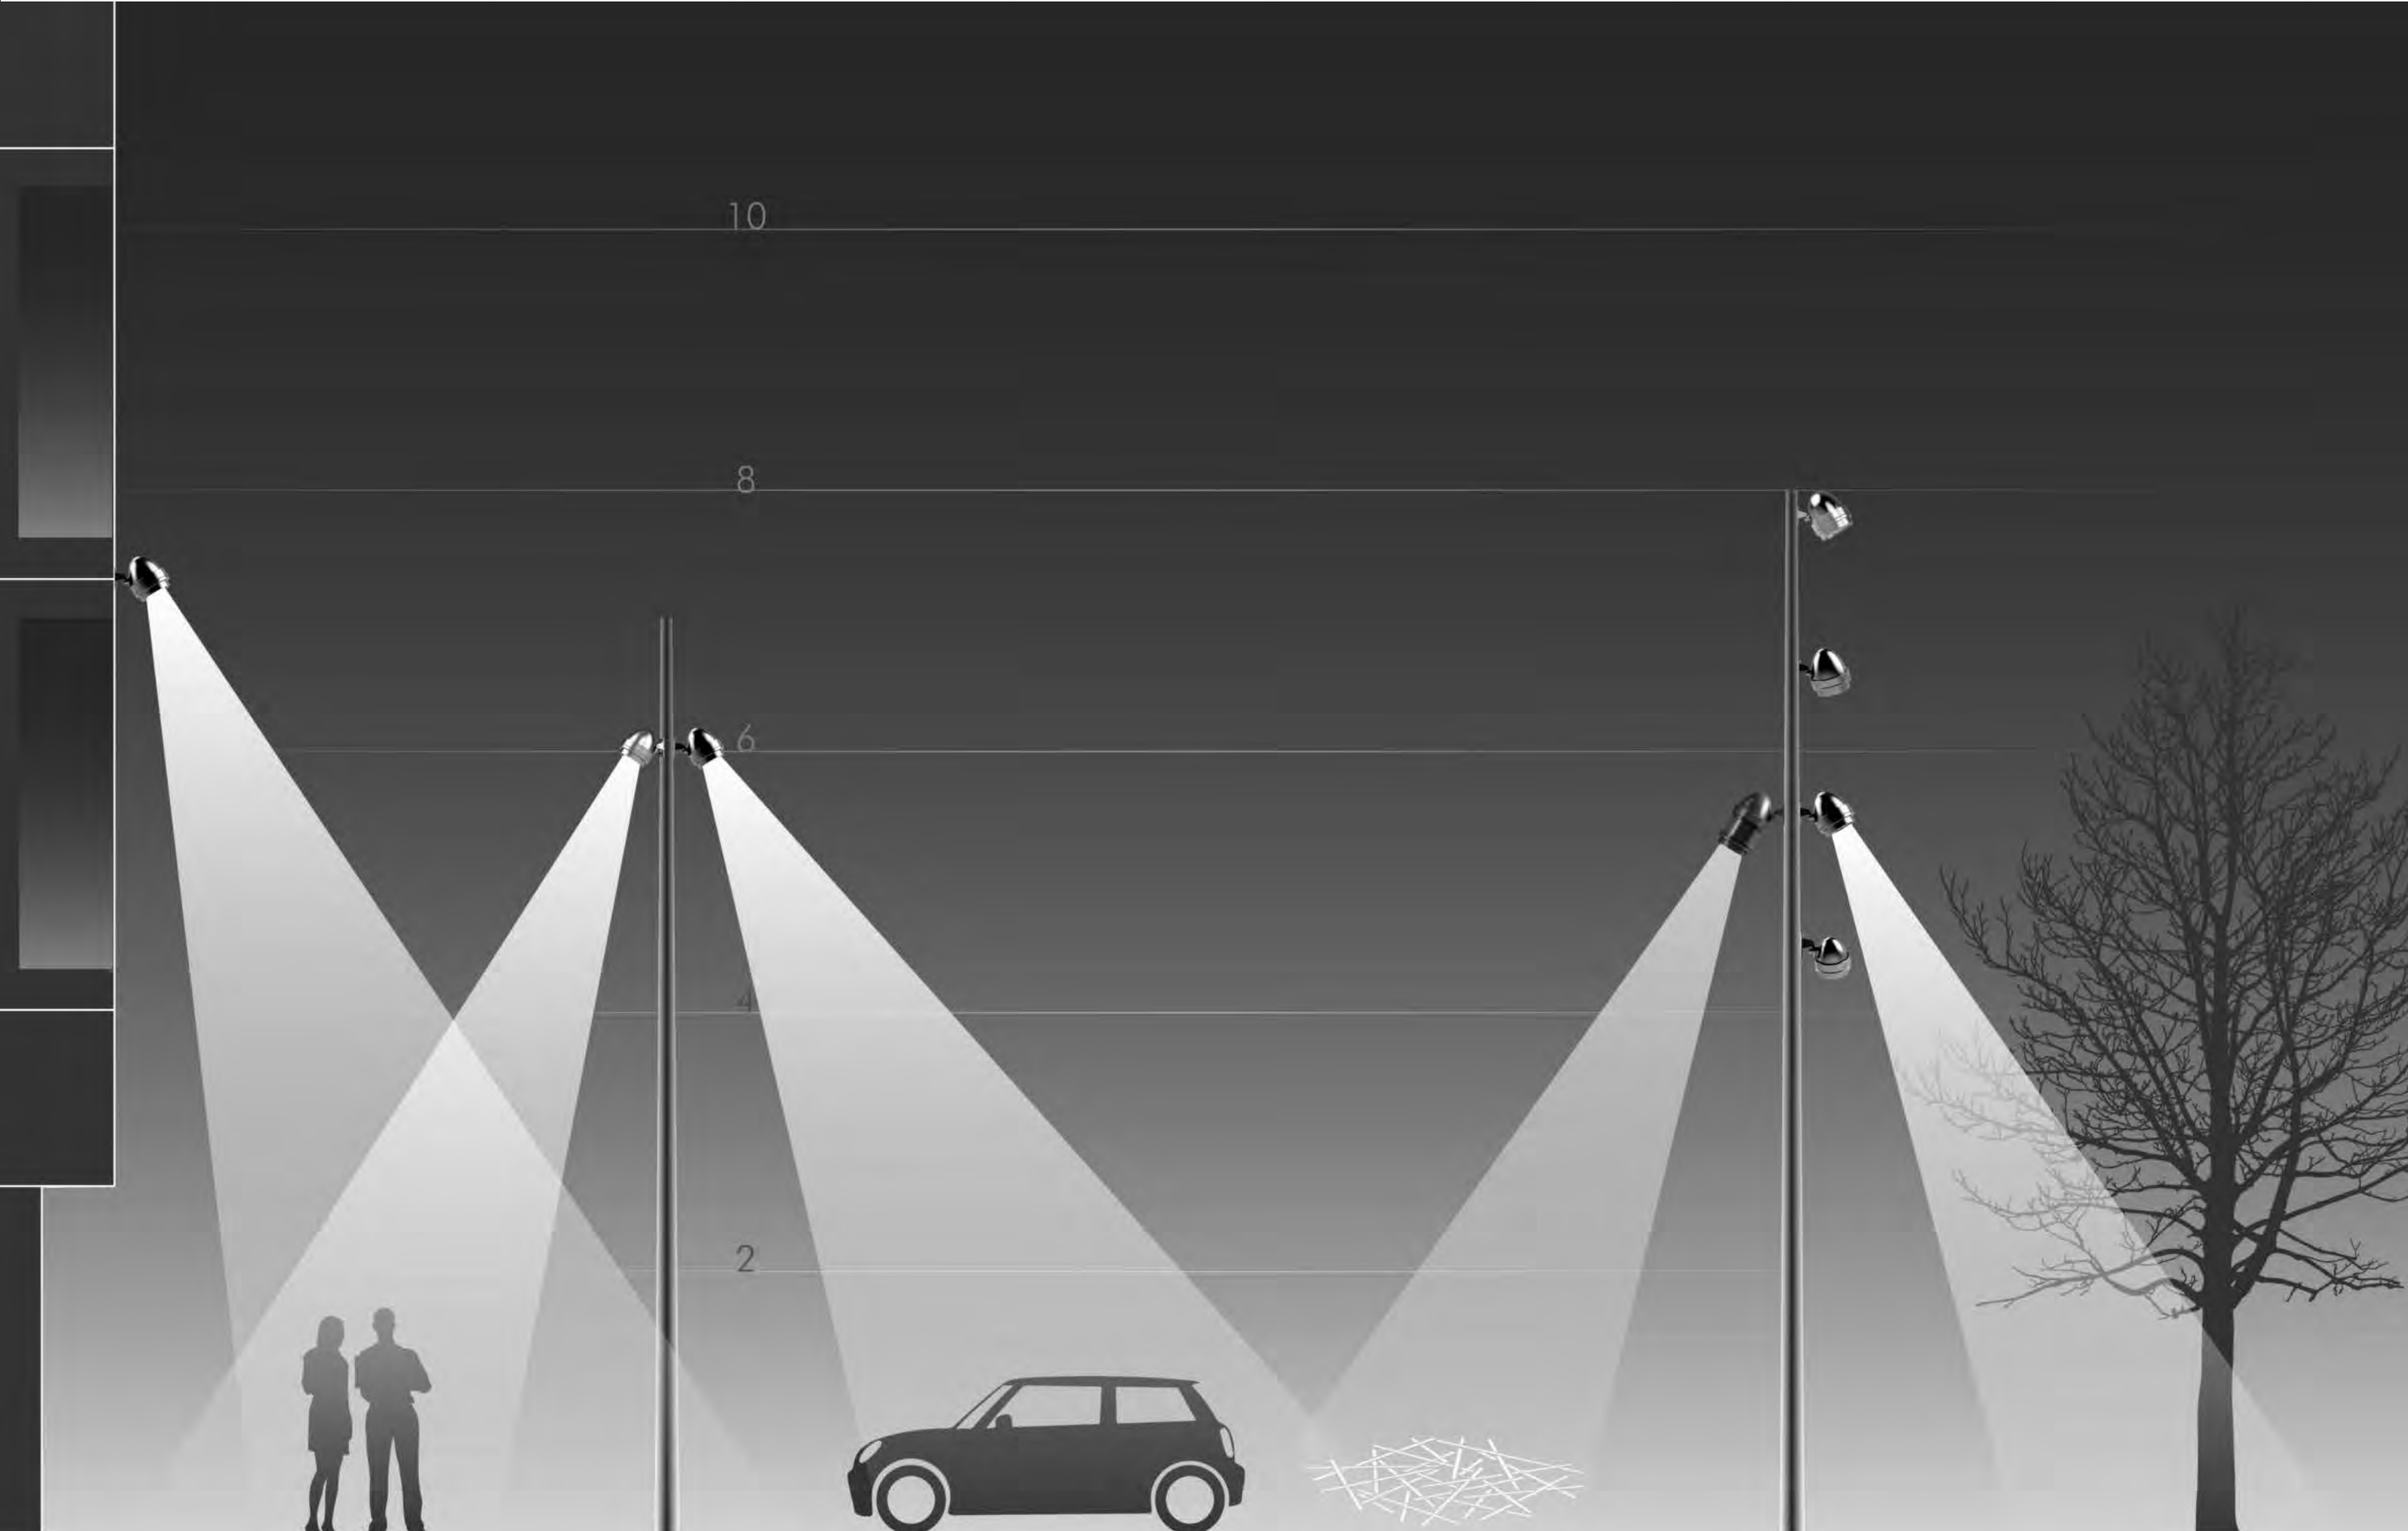




Nightspot A2 LED with mounting bracket

With a high performance LED module and integral temperature monitoring device protection class I, IP65 , IK08 windage area AW 0.035 m² die cast aluminium housing, polyester powder coated, rotationally symmetrical aluminium reflector, integral secondary reflector to reduce glare, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, closure with 4 stainless steel screws, powder coated aluminium mounting bracket with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range 135°, M20 cable gland, integral driver (AC/DC)

Nightspot A2 LED, with mounting base





With a high performance LED module and integral temperature monitoring device protection class I, IP65 , IK08 windage area AW 0.035 m² die cast aluminium housing, polyester powder coated, rotationally symmetrical aluminium reflector, integral secondary reflector to reduce glare, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, closure with 4 stainless steel screws, adjustable aluminium mounting base, powder coated: 2 drilled holes Ø 9 mm, spacing 105 mm, 1 centre hole Ø 22 mm, tilt range 125°, swivel range 220°, M20 cable gland, integral driver (AC/DC)



Nightspot A2 LED with mounting bracket, narrow beam

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 046 019	black	1 x LED module 33 W	2.7 kg	13°
8 983 066 019	white	warm white (3000 K)		
8 983 056 019	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.









Nightspot A2 LED with mounting base, narrow beam

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 146 019	black	1 x LED module 33 W	2.5 kg	13°
8 983 166 019	white	warm white (3000 K)		
8 983 156 019	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.

Nightspot A2 LED with mounting bracket, narrow beam

Part number	Description	Half beam angle γ	
. 7.	Luminaire with ribbed glass spreader lense, internally fitted, for linear beam distribution, continuously adjustable through 360°	C 0 – 180 17°	C 90 – 270 31°







Nightspot A2 LED with mounting base, narrow beam

Part number	Description	Half beam angle γ	
. 7.	Luminaire with ribbed glass spreader lense, internally fitted, for linear beam distribution, continuously adjustable through 360°	C 0 – 180 17°	C 90 – 270 31°

Nightspot A2 LED with mounting bracket, medium wide beam

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 046 049	black	1 x LED module 33 W	2.7 kg	20°
8 983 066 049	white	warm white (3000 K)		
8 983 056 049	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.



Nightspot A2 LED with mounting base, medium wide beam






Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 146 049	black	1 x LED module 33 W	2.5 kg	20°
8 983 166 049	white	warm white (3000 K)		
8 983 156 049	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.

Nightspot A2 LED with mounting bracket, wide beam (without secondary reflector)

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 046 059	black	1 x LED module 33 W	2.7 kg	67°
8 983 066 059	white	warm white (3000 K)		
8 983 056 059	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.



Nightspot A2 LED with mounting base, wide beam (without secondary reflector)

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 146 059	black	1 x LED module 33 W	2.5 kg	67°
8 983 166 059	white	warm white (3000 K)		
8 983 156 059	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.

Part number	Description
. 1..	Dimmable luminaire (DALI)
. 2..	Dimmable luminaire (1-10 V)

Part number	Description
. 1..	Dimmable luminaire (DALI)
. 2..	Dimmable luminaire (1-10 V)

LED


LEDs, replacement modules available



LED

LEDs, replacement modules available




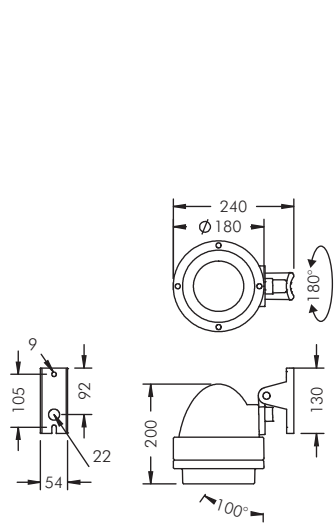


Nightspot A2 LED, pole luminaire
With a high performance LED module and integral temperature monitoring device protection class I, IP65 , IK08 windage area AW 0.035 m² die cast aluminium housing, polyester powder coated, rotationally symmetrical aluminium reflector, integral secondary reflector to reduce glare, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60 - 100 mm, powder coated aluminium mounting base: 2 drilled holes Ø 9 mm, spacing 105 mm, 1 centre hole Ø 22 mm, tilt range 100°, swivel range 180°, M20 cable gland, integral driver (AC/DC)

Nightspot A2 LED, pole luminaire, narrow beam




Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 246 019	black	1 x LED module 33 W	2.5 kg	13°
8 983 266 019	white	warm white (3000 K)		
8 983 256 019	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.



Nightspot A2 LED, pole luminaire, narrow beam



Part number	Description	Half beam angle γ
... .. .7.	Luminaire with ribbed glass spreader lense, internally fitted, for linear beam distribution, continuously adjustable through 360°	C 0 – 180 C 90 – 270



Nightspot A2 LED, pole luminaire, medium wide beam

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 246 049	black	1 x LED module 33 W	2.5 kg	20°
8 983 266 049	white	warm white (3000 K)		
8 983 256 049	silver grey			



*These luminaires are also available with neutral white LED (4000 K) upon request.












Nightspot A2 LED, pole luminaire, wide beam (without secondary reflector)

Part number*	Colour	Light source	Weight	Half beam angle γ
8 983 246 059	black	1 x LED module 33 W	2.5 kg	67°
8 983 266 059	white	warm white (3000 K)		
8 983 256 059	silver grey			

*These luminaires are also available with neutral white LED (4000 K) upon request.



Part number	Description
... .. .1..	Dimmable luminaire (DALI)
... .. .2..	Dimmable luminaire (1-10 V)



Accessories Nightspot A2 LED		
Part number	Colour	Description
129 0 578 940	black	Cowl, stainless steel, to avoid lateral glare
129 0 578 960	white	
129 0 578 950	silver grey	

Part number	Colour	Description
129 0 591 940	black	Protection grill, stainless steel, to protect the glass lens from breakage and vandalism, for retro-fitting
129 0 591 960	white	
129 0 591 950	silver grey	

Part number	Colour	Description
129 0 581 000	yellow	Colour filter, internally fitted
129 0 587 000	red	
129 0 583 000	blue	
129 0 588 000	green	

Accessories Nightspot A2 LED, narrow beam		Half beam angle γ	
Part number	Description	C 0-180	C 90-270
129 0 580 000	Ribbed glass, internally fitted, for linear beam control, continuously adjustable 360°	17°	31°

Accessories Nightspot A2 LED, with mounting bracket

Part number	Colour	Description
129 0 390 940	black	Stainless steel earth spike, for use in landscape lighting
129 0 390 960	white	
129 0 390 950	silver grey	

Part number	Colour	Description
128 0 626 940	black	Pole Top Fitter, aluminium, for 76 mm pole top, with M20 x 1.5 connection thread, for installation of one luminaire
128 0 626 960	white	
128 0 626 950	silver grey	


Part number	Colour	Description
119 0 033 940	black	Single pole mount clamp, aluminium, for poles Ø 76 – 89 mm
119 0 033 960	white	
119 0 033 950	silver grey	

Part number	Colour	Description
119 0 034 940	black	Double pole mount clamp, aluminium, for poles Ø 76 – 89 mm
119 0 034 960	white	
119 0 034 950	silver grey	

Part number	Colour	Description
119 0 031 940	black	Single pole mount arm, aluminium, for poles Ø 76 – 89 mm
119 0 031 960	white	
119 0 031 950	silver grey	


Part number	Colour	Description
119 0 032 940	black	Double pole mount arm, aluminium, for poles Ø 76 – 89 mm
119 0 032 960	white	
119 0 032 950	silver grey	





Nightspot B LED with mounting bracket
With a high performance LED module (Zhaga), integral temperature monitoring device protection class I, IP65 , IK08 windage area A_W 0.05 m² die cast aluminium housing, polyester powder coated, rotationally symmetrical aluminium reflector, integral secondary reflector to reduce glare, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminium with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range 135°, M20 cable gland, integral driver (AC/DC)

Nightspot B RGBW-LED with mounting bracket
With 7 x RGBW high performance LEDs, external DMX-controller required, integral temperature monitoring device protection class I, IP65 , IK08 windage area A_W 0.05 m² die cast aluminium housing, polyester powder coated, all exterior steel parts are stainless steel, tempered safety glass, silicon gasket, closure with 4 stainless steel screws, mounting bracket powder coated aluminium with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range 135°, M20 cable gland for power supply and M12 cable gland for DMX signal In, integral driver (AC/DC)



Nightspot B LED with mounting bracket, narrow beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 046 019	black	1 x LED module 54 W	5.0 kg	12°
8 986 066 019	white	warm white (3000 K)		
8 986 056 019	silver grey			

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 045 019	black	1 x LED module 54 W	5.0 kg	12°
8 986 065 019	white	neutral white (4000 K)		
8 986 055 019	silver grey			

Nightspot B LED with mounting bracket, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 046 049	black	1 x LED module 54 W	5.0 kg	18°
8 986 066 049	white	warm white (3000 K)		
8 986 056 049	silver grey			










Part number	Colour	Light source	Weight	Half beam angle γ
8 986 045 049	black	1 x LED module 54 W	5.0 kg	18°
8 986 065 049	white	neutral white (4000 K)		
8 986 055 049	silver grey			

Nightspot B LED with mounting bracket, wide beam (without secondary reflector)

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 046 049	black	1 x LED module 54 W	5.0 kg	48°
8 986 066 049	white	warm white (3000 K)		
8 986 056 049	silver grey			

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 045 049	black	1 x LED module 54 W	5.0 kg	48°
8 986 065 049	white	neutral white (4000 K)		
8 986 055 049	silver grey			

Part number	Description
. 1 . .	Dimmable version (DALI)



LED

LEDs, replacement modules available



LED

LEDs, replacement modules available



Nightspot B RGBW-LED, with mounting bracket, narrow beam


Part number	Colour	Light source	Weight	Half beam angle γ
8 986 049 019	black	7 x LED RGBW 1.5 W	6.1 kg	19°
8 986 069 019	white	(max. 42 W)		
8 986 059 019	silver grey			

Nightspot B RGBW-LED, with mounting bracket, elliptical beam spread

Part number	Colour	Light source	Weight	Half beam angle γ	
8 986 049 029	black	7 x LED RGBW 1.5 W	6.1 kg	C 0 – 180	C 90 – 270
8 986 069 029	white	(max. 42 W)		47°	24°
8 986 059 029	silver grey				

Nightspot B RGBW-LED, with mounting bracket, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 049 049	black	7 x LED RGBW 1.5 W	6.1 kg	30°
8 986 069 049	white	(max. 42 W)		
8 986 059 049	silver grey			




Nightspot B LED with mounting base

With a high performance LED module (Zhaga),
integral temperature monitoring device
protection class I, IP65 , IK08
windage area AW 0.05 m²
die cast aluminium housing, polyester powder coated,
rotationally symmetrical aluminium reflector,
integral secondary reflector to reduce glare,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
powder coated aluminium mounting base adjustable:
2 drilled holes Ø 9 mm, spacing 105 mm,
1 centre hole Ø 22 mm, tilt range 125°,
swivel range 220°, M20 cable gland,
integral driver (AC/DC)

Nightspot B RGBW-LED with mounting base

With 7 x RGBW high performance LEDs,
external DMX-controller required,
integral temperature monitoring device
protection class I, IP65   , IK08
windage area A_W 0.05 m²
die cast aluminium housing, polyester powder coated,
all exterior steel parts are stainless steel, tempered
safety glass, silicon gasket, closure with 4 stainless
steel screws, powder coated aluminium mounting
base adjustable: 2 drilled holes Ø 9 mm, spacing
105 mm, 1 centre hole Ø 22 mm, tilt range 125°,
swivel range 220°, M20 cable gland for power
supply and M12 cable gland for DMX signal In,
integral driver (AC/DC)



Nightspot B LED with mounting base, narrow beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 146 019	black	1 x LED module 54 W	4.8 kg	12°
8 986 166 019	white	warm white (3000 K)		
8 986 156 019	silver grey			

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 145 019	black	1 x LED module 54 W	4.8 kg	12°
8 986 165 019	white	neutral white (4000 K)		
8 986 155 019	silver grey			

Nightspot B LED with mounting base, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 146 049	black	1 x LED module 54 W	4.8 kg	18°
8 986 166 049	white	warm white (3000 K)		
8 986 156 049	silver grey			







Part number	Colour	Light source	Weight	Half beam angle γ
8 986 145 049	black	1 x LED module 54 W	4.8 kg	18°
8 986 165 049	white	neutral white (4000 K)		
8 986 155 049	silver grey			

Nightspot B LED with mounting base, wide beam (without secondary reflector)

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 146 059	black	1 x LED module 54 W	4.8 kg	48°
8 986 166 059	white	warm white (3000 K)		
8 986 156 059	silver grey			




Part number	Colour	Light source	Weight	Half beam angle γ
8 986 145 059	black	1 x LED module 54 W	4.8 kg	48°
8 986 165 059	white	neutral white (4000 K)		
8 986 155 059	silver grey			

Part number	Description
. 1..	Dimmable version (DALI)

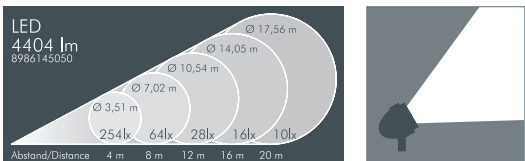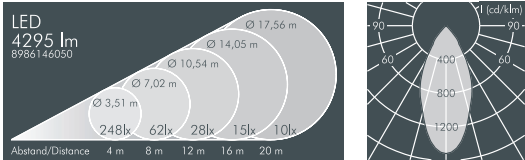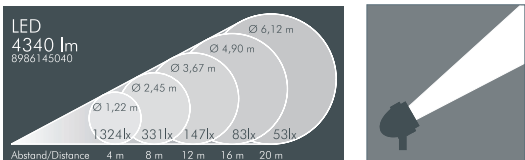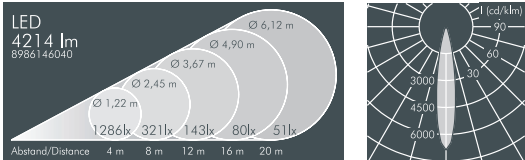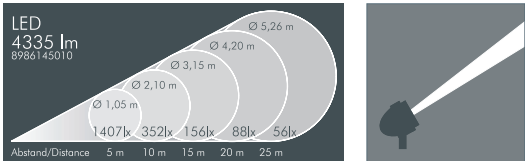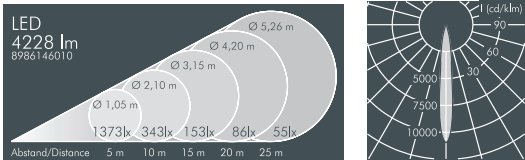

LED

LEDs, replacement modules available



LED

LEDs, replacement modules available



Nightspot B RGBW-LED, with mounting base, narrow beam


Part number	Colour	Light source	Weight	Half beam angle γ
8 986 149 019	black	7 x LED RGBW 1.5 W	5.9 kg	19°
8 986 169 019	white	(max. 42 W)		
8 986 159 019	silver grey			

Nightspot B RGBW-LED, with mounting base, elliptical beam spread

Part number	Colour	Light source	Weight	Half beam angle γ	
8 986 149 029	black	7 x LED RGBW 1.5 W	5.9 kg	C 0 – 180	C 90 – 270
8 986 169 029	white	(max. 42 W)		47°	24°
8 986 159 029	silver grey				

Nightspot B RGBW-LED, with mounting base, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 149 049	black	7 x LED RGBW 1.5 W	5.9 kg	30°
8 986 169 049	white	(max. 42 W)		
8 986 159 049	silver grey			




Nightspot B LED, pole lumineaire

With a high performance LED module,
integral temperature monitoring device
protection class I, IP65 , IK08
windage area AW 0.05 m²
die cast aluminium housing, polyester powder coated,
rotationally symmetrical aluminium reflector,
integral secondary reflector to reduce glare,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
for pole diameter Ø 60–100 mm,
rotatable, powder coated aluminium mounting base:
2 drilled holes Ø 9 mm, spacing 105 mm,
1 centre hole Ø 22 mm, tilt range 80°,
swivel range 180°, M20 cable gland,
integral driver (AC/DC)

Nightspot B RGBW-LED, pole luminaire



With 7 x RGBW high performance LEDs,
external DMX-controller required,
integral temperature monitoring device
protection class I, IP65 , IK08
windage area A_W 0.05 m²
die cast aluminium housing, polyester powder coated,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
for pole diameter Ø 60–100 mm,
rotatable, powder coated aluminium mounting base:
2 drilled holes Ø 9 mm, spacing 105 mm,
1 centre hole Ø 22 mm, tilt range 80°,
swivel range 180°, M20 cable gland,
connection by hybrid cable 230 V/DMX,
integral driver (AC/DC)



Nightspot B LED, pole luminaire, narrow beam



Part number	Colour	Light source	Weight	Half beam angle γ
8 986 246 019	black	1 x LED module 54 W	4.8 kg	12°
8 986 266 019	white	warm white (3000 K)		
8 986 256 019	silver grey			

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 245 019	black	1 x LED module 54 W	4.8 kg	12°
8 986 265 019	white	neutral white (4000 K)		
8 986 255 019	silver grey			

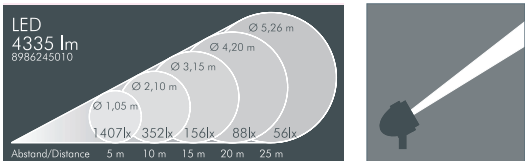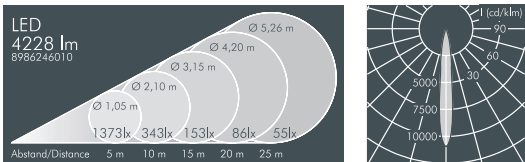


Nightspot B LED, pole luminaire, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 246 049	black	1 x LED module 54 W	4.8 kg	18°
8 986 266 049	white	warm white (3000 K)		
8 986 256 049	silver grey			

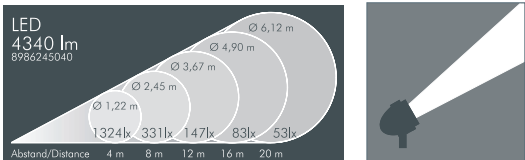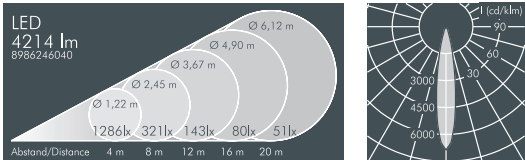


Nightspot B LED, pole luminaire, wide beam (without secondary reflector)

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 246 059	black	1 x LED module 54 W	4.8 kg	48°
8 986 266 059	white	warm white (3000 K)		
8 986 256 059	silver grey			

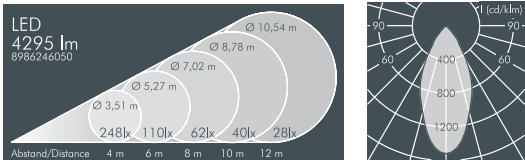

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 245 059	black	1 x LED module 54 W	4.8 kg	48°
8 986 265 059	white	neutral white (4000 K)		
8 986 255 059	silver grey			

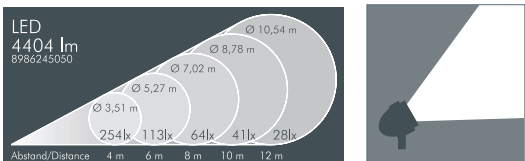




Part number	Description
. 1 . .	Dimmable version (DALI)

Nightspot B RGBW-LED, pole luminaire, narrow beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 249 019	black	7 x LED RGBW 1.5 W	5.9 kg	19°
8 986 269 019	white	(max. 42 W)		
8 986 259 019	silver grey			

Nightspot B RGBW-LED, pole luminaire, elliptical beam spread


Part number	Colour	Light source	Weight	Half beam angle γ	
8 986 249 029	black	7 x LED RGBW 1.5 W	5.9 kg	C 0 – 180	C 90 – 270
8 986 269 029	white	(max. 42 W)		47°	24°
8 986 259 029	silver grey				



Nightspot B RGBW-LED, pole luminaire, medium wide beam

Part number	Colour	Light source	Weight	Half beam angle γ
8 986 249 049	black	7 x LED RGBW 1.5 W	5.9 kg	30°
8 986 269 049	white	(max. 42 W)		
8 986 259 049	silver grey			





Nightspot B LED, pole luminaire
Street Optic

With a high performance LED module,
integral temperature monitoring device
protection class I, IP65 , IK08
windage area AWW 0.05 m²
die cast aluminium housing, polyester powder coated,
lens made of high efficiency optical silicon,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
for pole diameter Ø 60–100 mm,
rotatable, powder coated aluminium mounting base:
2 drilled holes Ø 9 mm, spacing 105 mm,
1 centre hole Ø 22 mm, tilt range 80°,
swivel range 180°, M20 cable gland,
integral driver

Nightspot B LED, pole luminaire, Street Optic

Part number	Colour	Light source	Weight	Half beam angle γ	
8 988 246 009	black	1 x LED module 41 W	5.6 kg	C 0 – 180	C 90 – 270
8 988 266 009	white	warm white (3000 K)		63°	28°
8 988 256 009	silver grey				












Part number	Colour	Light source	Weight	Half beam angle γ	
8 988 245 009	black	1 x LED module 41 W	5.6 kg	C 0 – 180	C 90 – 270
8 988 265 009	white	neutral white (4000 K)		63°	28°
8 988 255 009	silver grey				

Part number	Description
• 1 . .	Dimmable version (DALI)

Illumination examples (according to DIN EN 13201-2)

	Lighting situation			
	S(P)2	S(P)3	S(P)4	S(P)5
LPH	6 m	6 m	6 m	6 m
D	30 m	36 m	40 m	42 m
D/H	5	6	6.7	7
Em	10.1 lx	8.4 lx	7.6 lx	7.2 lx
Emin	4.4 lx	1.5 lx	1.0 lx	0.7 lx
Emin/Em	0.43	0.22	0.13	0.1
TI*	15%	17%	19%	20%

* TI: Threshold Increment (unit for measuring glare).
A low TI value indicates a low glare factor.



Accessories Nightspot B LED		
Part number	Colour	Description
129 0 320 940	black	Cowl, stainless steel, to avoid lateral glare
129 0 320 960	white	
129 0 320 950	silver grey	

Part number	Colour	Description
129 0 340 940	black	Protection grill, stainless steel, to protect the glass lens from breakage and vandalism, for retro-fitting
129 0 340 960	white	
129 0 340 950	silver grey	

Part number	Colour	Description
129 0 631 000	yellow	Colour filter, internally fitted
129 0 637 000	red	
129 0 633 000	blue	
129 0 638 000	green	

Accessories Nightspot B LED, narrow beam		Half beam angle γ	
Part number	Description	C 0-180	C 90-270
129 0 627 000	Ribbed glass, internally fitted, for linear beam control, continuously adjustable 360°	15°	34°

Accessories Nightspot B LED, with mounting bracket

Part number	Colour	Description
129 0 390 940	black	Stainless steel earth spike, for use in landscape lighting
129 0 390 960	white	
129 0 390 950	silver grey	

Part number	Colour	Description
128 0 626 940	black	Pole Top Fitter, aluminium, for 76 mm pole top, with M20 x 1.5 connection thread, for installation of one luminaire
128 0 626 960	white	
128 0 626 950	silver grey	

Part number	Colour	Description
119 0 033 940	black	Single pole mount clamp, aluminium, for poles Ø 76 – 89 mm
119 0 033 960	white	
119 0 033 950	silver grey	

Part number	Colour	Description
119 0 034 940	black	Double pole mount clamp, aluminium, for poles Ø 76 – 89 mm
119 0 034 960	white	
119 0 034 950	silver grey	


Part number	Colour	Description
119 0 031 940	black	Single pole mount arm, aluminium, for poles Ø 76 – 89 mm
119 0 031 960	white	
119 0 031 950	silver grey	

Part number	Colour	Description
119 0 032 940	black	Double pole mount arm, aluminium, for poles Ø 76 – 89 mm
119 0 032 960	white	
119 0 032 950	silver grey	

LED


LEDs, replacement modules available





Nightspot B LED Gobo Projector

With high performance LED-Modul
protection class I, IP65  , IK08
windage area A_W 0.085 m²
die cast aluminium housing,
polyester powder coated, focusable lense,
carrier for gobos and colour filters,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
mounting bracket powder coated aluminium with tilt
scale: 2 drilled holes Ø 9 mm, spacing 70 mm,
1 centre hole Ø 22 mm, tilt range 115°,
M20 cable gland, integral driver (AC/DC)

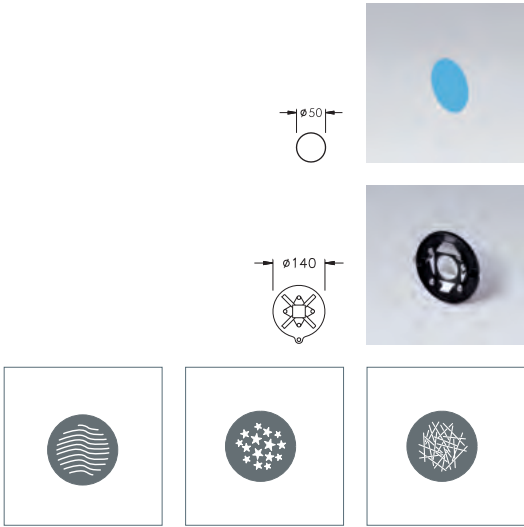

Accessories for Nightspot B LED Gobo Projector		
63/85/150 mm focal length		
Part number	Colour	Description
129 0 551 000	yellow	Dichroic colour filter
129 0 557 000	red	
129 0 553 000	blue	
129 0 558 000	green	


Part number	Description
129 0 257 000	Framer for sharp edges on 3 or 4-sided images

Part number	Example	Description
129 0 489 000	waves	Standard gobos Ø 50 mm
129 0 490 000	stars	
129 0 491 000	hatch	

Custom made gobos can be produced from Image data in one of the following file
formats: **EPS** (min. 300 dpi), **TIF** (min. 300 dpi), **JPG** (in low compression).
Max. image size D on gobo: D = 38 mm (outer diameter gobo 50 mm)


Nightspot B LED Gobo Projector, 63 mm focal length

Part number	Colour	Light source	Weight	Beam angle
8 987 044 059	black	1 x LED module 47 W	8.0 kg	30°
8 987 064 059	white	cold white (6500 K)		
8 987 054 059	silver grey			

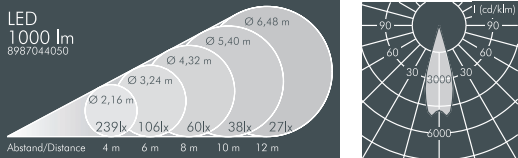


Nightspot B LED Gobo Projector, 85 mm focal length

Part number	Colour	Light source	Weight	Beam angle
8 987 044 049	black	1 x LED module 47 W	8.0 kg	20°
8 987 064 049	white	cold white (6500 K)		
8 987 054 049	silver grey			


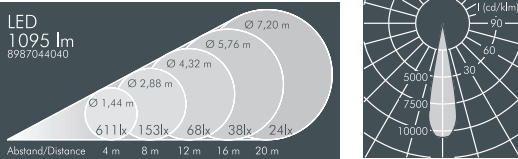


Nightspot B LED Gobo Projector, 150 mm focal length

Part number	Colour	Light source	Weight	Beam angle
8 987 044 019	black	1 x LED module 47 W	8.1 kg	12°
8 987 064 019	white	cold white (6500 K)		
8 987 054 019	silver grey			

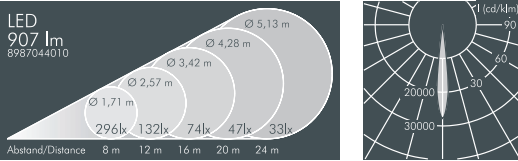

Part number	Description
... 1 ...	Dimmable version (DALI)

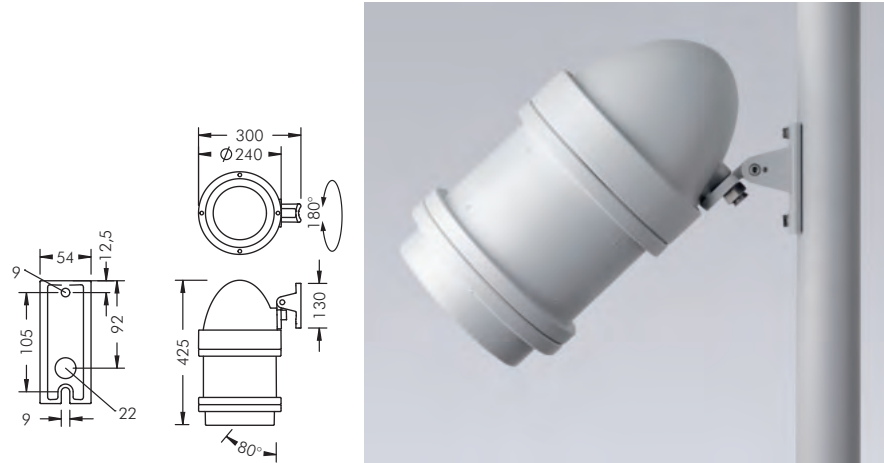

Part number	Description
... 2 ...	Goboscheinwerfer for pole mounting

Nightspot B LED Gobo Projector pole luminaire


With high performance LED-Modul
protection class I, IP65  , IK08
windage area A_W 0.085 m²
die cast aluminium housing,
polyester powder coated, focusable lense,
carrier for gobos and colour filters,
all exterior steel parts are stainless steel,
tempered safety glass, silicon gasket,
closure with 4 stainless steel screws,
for pole diameter Ø 60–100 mm,
rotatable, powder coated aluminium mounting base:
2 drilled holes Ø 9 mm, spacing 105 mm,
1 centre hole Ø 22 mm, tilt range 80°,
swivel range 180°, M20 cable gland,
integral driver (AC/DC)

LED


LEDs, replacement modules available



Max. diameter of image, focal length f, gobo aperture Ø 38 mm

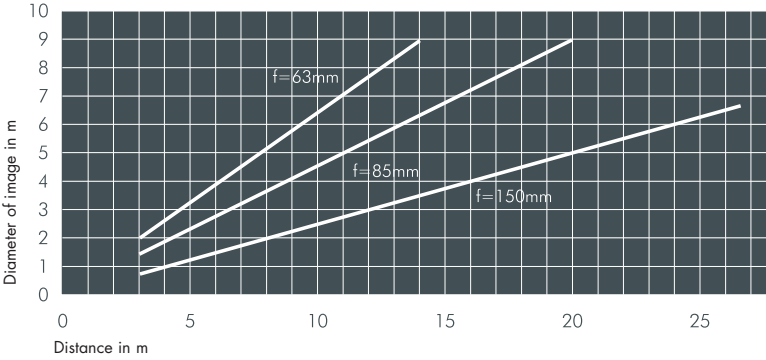

Lux level comparison HIT-CE 100 W / LED 47 W

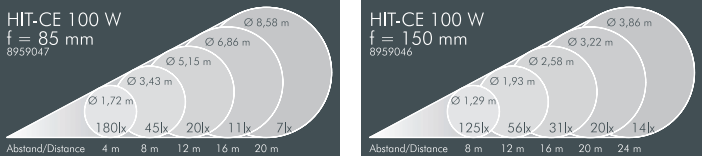

focal length 85 mm, distance 12 m:

HIT-CE 100 W:
20 lux average level
LED 47 W:
68 lux average level

focal length 150 mm, distance 16 m:

HIT-CE 100 W:
31 lux average level
LED 47 W:
74 lux average level

Accessories for Nightspot B LED Gobo Projector		
Part number	Colour	Description
128 0 626 940	black	Pole Top Fitter , aluminium, for 76mm pole top, with M20 x 1.5 connection thread, for installation of one luminaire
128 0 626 960	white	
128 0 626 950	silver grey	

Part number	Colour	Description
119 0 035 940	black	Single pole mount arm , aluminium, for poles Ø 76 – 89 mm
119 0 035 960	white	
119 0 035 950	silver grey	

Part number	Colour	Description
119 0 032 940	black	Double pole mount arm , aluminium, for poles Ø 76 – 89 mm
119 0 032 960	white	
119 0 032 950	silver grey	



Willy Meyer+Sohn GmbH+Co. KG
Stemmessiepener Weg 5
D-58675 Hemer
Telephone: +49 (0) 23 72/98 91-0
Telefax Sales: +49 (0) 23 72/98 91-38
Telefax Export: +49 (0) 23 72/98 91-48
E-mail: info@meyer-lighting.com
www.meyer-lighting.com

