

Our date: March 2013

Earlier date: August 1999

Created by
Nowegian Defence Logistics Organisation

BOX, CARDBOARD

Users:
Army
Navy
Air Force



Quality: Corrugated cardboard D/D consists of the following paper qualities:
186 g kraft liner on the outside, 3x112 g corrugated paper, 150 g test liner on the inside

Description: The cardboard boxes should be of the shaft type FEFCO nr 0201
The boxes should be delivered flatpacked and glued
The boxes should conform to Europall (800 x 1200 mm)

Area for use: Packing and shipping of quartermaster materiel

Labelling: The boxes should be labelled by box-type, quality symbol and volume

Controll: AQAP 2130 NATO Quality Assurance Requirements for inspection and test

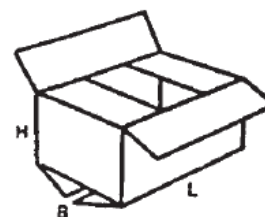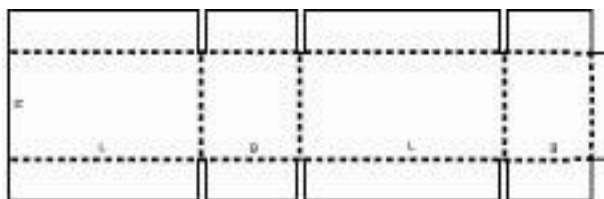

FEFCO nr 0201

NATO-catalog number	External measurements in mm Length/width/height	Volum e m3	Number of layers on pallet	Quality	Box type
8115-25-116-1982	390x390x190	0,0289	6	D/D	A
8115-25-116-1983	390x390x380	0,0578	6	D/D	B
8115-25-116-1984	580x390x380	0,0860	4	D/D	C
8115-25-116-1985	780x390x380	0,1156	3	D/D	D

LINING FOR THE CARDBOARD BOXES

Nato-catalog number	Measurements in mm Length/width	Box type
8115-25-124-4115	180x370	C
8115-25-124-4116	370x370	D